



Xtreme-Duty™

High Pressure Airless Hose

Distributed by:



Features and benefits

- Complete line of hoses for all your high pressure spraying
- Color-coded by pressure to take the guesswork out of using the right hose
- Durable design meets exacting standards and reduces downtime
- Easy-to-order, configurable part numbering system

PROVEN QUALITY. LEADING TECHNOLOGY.



The Right Hose for the Job

Technical Specifications


Working pressure 4500 psi (310 bar), 5600 psi (386 bar), 7250 psi (500 bar)
 Temperature rating (all sizes) -40 to 180° F (-40 to 82°C)
 Chemical resistance Hose cover resistant to a wide variety of solvents, acids and bases
 Weather resistance Hose cover has outstanding resistance to oxygen, ozone, sunlight and general weather conditions

Electrical properties Conductive hose

Xtreme-Duty airless high pressure hose has passed the following quality and performance tests:

- Impulse
- Burst
- Cold Bend
- Flexibility
- Change of Length
- Visual Inspections

Selecting the Right Xtreme-Duty High Pressure Airless Hose

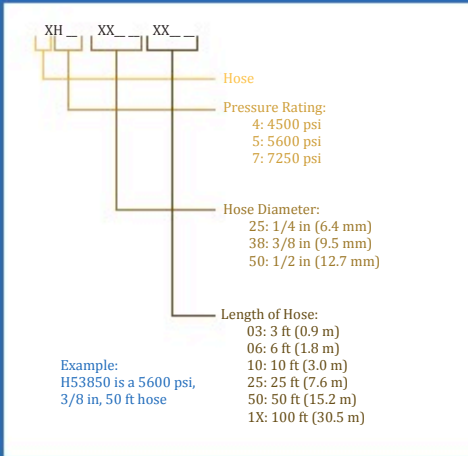

Graco XTR Guns

Rugged design to handle the toughest protective coatings

- Compact design
- Lightweight and ergonomic
- XTR-5: 5000 psi (345 bar, 34.5 MPa)
- XTR-7: 7250 psi (500 bar, 50.0 MPa)
- Variety of handle and trigger options



XTR-5 Airless Spray Gun

Maximum working pressure: 5000 psi (345 bar, 34.5 MPa)

XTR500 1-in round handle, four-finger trigger, no tip
 XTR501 1-in round handle, four-finger trigger, flat tip*

XTR502 Oval insulated handle, four-finger trigger, XHD RAC tip*
 XTR503 Oval insulated handle, two-finger trigger, XHD RAC tip*
 XTR504 1-in round handle, four-finger trigger, XHD RAC tip*

XTR505 1-in round handle, two-finger trigger, XHD RAC tip*

XTR-7 Airless Spray Gun

Maximum working pressure: 7250 psi (500 bar, 50.0 MPa)

XTR700 1-in round handle, four-finger trigger, no tip
 XTR701 1-in round handle, four-finger trigger, flat tip*
 XTR702 Oval insulated handle, four-finger trigger, XHD RAC tip*
 XTR703 Oval insulated handle, two-finger trigger, XHD RAC tip*

XTR704 1-in round handle, four-finger trigger, XHD RAC tip*
 XTR705 1-in round handle, two-finger trigger, XHD RAC tip*

* Includes 519 tip

Xtreme-Duty High Pressure Hoses

Xtreme-Duty 4500 psi (310 bar) High Pressure Hose

Part #	Length	Diameter	Female NPSM
H42503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H42506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H42510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H42525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H42550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H4251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H43803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H43806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H43810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H43825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H43850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H4381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H45010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H45025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H45050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H4501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in



Color Key:



Xtreme-Duty 5600 psi (386 bar) High Pressure Hose

Part #	Length	Diameter	Female NPSM
H52503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H52506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H52510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H52525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H52550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H5251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H53803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H53806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H53810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H53825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H53850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H5381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H55010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H55025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H55050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H5501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in

Xtreme-Duty 7250 psi (500 bar) High Pressure Hose

Part #	Length	Diameter	Female NPSM
H72503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H72506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H72510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H72525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H72550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H7251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H73803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H73806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H73810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H73825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H73850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H7381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H75010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H75025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H75050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H7501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in

Contact us today!

call 1-800-CLEMTEX or visit us online at www.clemtex.com

Distributed by:

