



XHD RAC[®] SwitchTip

High-Pressure Airless Spray Tip

Distributed by:



Improve spraying productivity and reduce downtime with the new XHD RAC SwitchTip


- Saves time – no screwdriver required
- Change tip sizes in seconds – without removing the tip guard housing
- Locking tab ensures tip stays securely in guard
- For heavy-duty applications up to 7250 psi (500 bar, 50.0 MPa)
- Recommended for Xtreme Sprayers and XTR Airless Spray Guns

PROVEN QUALITY. LEADING TECHNOLOGY.



XHD RAC SwitchTip

Your best choice for spraying high-pressure coatings

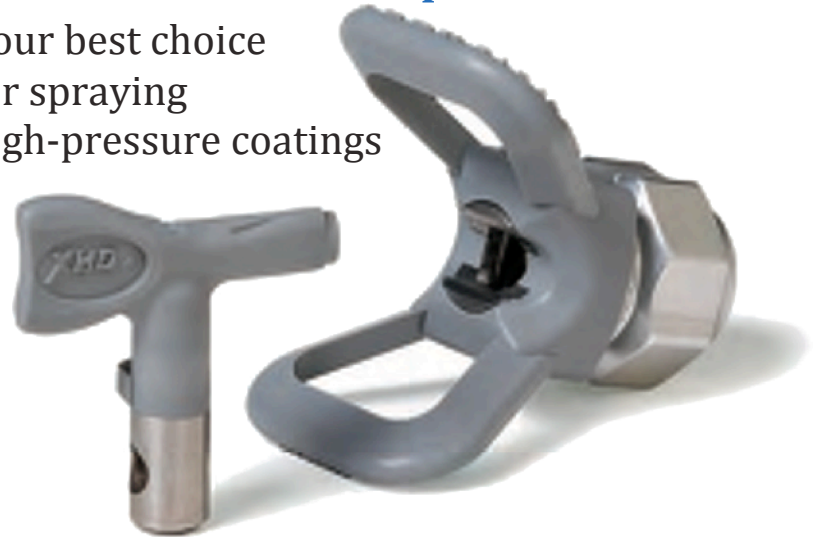

Genuine Graco quality in a high-pressure tip

Graco XTR Guns

Rugged design to handle the toughest protective coatings

- Compact design
- Lightweight and ergonomic
- XTR-5: 5000 psi (345 bar, 34.5 MPa)
- XTR-7: 7250 psi (500 bar, 50.0 MPa)
- Variety of handle and trigger options



XTR-5 Airless Spray Gun

Maximum working pressure: 5000 psi (345 bar, 34.5 MPa)

- XTR500 1-in round handle, four-finger trigger, no tip
- XTR501 1-in round handle, four-finger trigger, flat tip*

- XTR502 Oval insulated handle, four-finger trigger, XHD RAC tip*
- XTR503 Oval insulated handle, two-finger trigger, XHD RAC tip*
- XTR504 1-in round handle, four-finger trigger, XHD RAC tip*

- XTR505 1-in round handle, two-finger trigger, XHD RAC tip*

XTR-7 Airless Spray Gun

Maximum working pressure: 7250 psi (500 bar, 50.0 MPa)

- XTR700 1-in round handle, four-finger trigger, no tip
- XTR701 1-in round handle, four-finger trigger, flat tip*

- XTR702 Oval insulated handle, four-finger trigger, XHD RAC tip*
- XTR703 Oval insulated handle, two-finger trigger, XHD RAC tip*
- XTR704 1-in round handle, four-finger trigger, XHD RAC tip*

- XTR705 1-in round handle, two-finger trigger, XHD RAC tip*

* Includes 519 tip

		ORIFICE SIZE - INCHES																				
		IN	(MM)	.007	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.033	.035	.037	.039		
FAN WIDTH	2-4 (51-102)			107	109	111	113	115	117	119	121										139	
	4-6 (102-152)			209	211	213	215	217	219	221			225	227	229	231		235			239	
	6-8 (152-203)	307	309	311	313	315	317	319	321	323	325	327	329	331	333	335	337	339	341	343	345	
	8-10 (203-254)		409	411	413	415	417	419	421	423	425	427	429	431	433	435	437	439	441	443	445	
	10-12 (254-305)		509	511	513	515	517	519	521	523	525	527	529	531	533	535	537	539	541	543	545	
	12-14 (305-356)		609	611	613	615	617	619	621	623	625	627	629	631	633	635	637	639	641	643	645	647
	14-16 (356-406)			711	713	715	717	719	721	723	725	727	729	731	733	735	737	739	741	743	745	747
	16-18 (406-457)				813	815	817	819	821	823	825	827	829	831	833	835	837	839	841	843	845	847
	18-20 (457-508)										923				931	933	935	937	939			
		Flow Rate (gpm)	.05	.09	.12	.18	.24	.31	.38	.47	.57	.67	.74	.90	1.03	1.17	1.31	1.47	1.63			
	Flow Rate (lpm)	.20	.33	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	5.56	6.18				

		ORIFICE SIZE - INCHES																				
		IN	(MM)	.041	.043	.045	.047	.049	.051	.053	.055	.057	.059	.061	.063	.065	.067	.069	.071	.075	.081	
FAN WIDTH	2-4 (51-102)																					
	4-6 (102-152)																					
	6-8 (152-203)	341	343	345	347			351			355											
	8-10 (203-254)	441	443	445	447	449	451				455		459	461	463	465	467			471	475	481
	10-12 (254-305)	541	543	545	547	549	551	553	555	557		561		565	567					571	575	
	12-14 (305-356)	641	643	645	647	649	651		655	657	659		661	663	665	667	669	671	675			
	14-16 (356-406)	741	743		747	749	751	753	755			761						767		771		
	16-18 (406-457)	841	843		847			851				855			861	863		867				
	18-20 (457-508)																					
		Flow Rate (gpm)	1.8	1.98	2.17	2.37	2.58	2.79	4.26	3.25	3.49	3.74	4.0	4.26	4.53	4.82	5.11	5.41	6.04	7.04		
	Flow Rate (lpm)	6.83	7.51	8.23	8.98	9.76	10.57	16.13	12.29	13.20	14.14	15.12	16.13	17.17	18.24	19.34	20.48	22.85	26.66			

Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate
Example: for a tip with a .039 in orifice and a 10-in (254 mm) pattern, order XHD539

Graco XHD Guard

XHD001 XHD RAC Guard for pressures up to 7250 psi (500 bar, 50.0 MPa)

Flexible design

- Compatible with the original Heavy Duty RAC SwitchTips (GHDxxxx)



You can use the new XHD tips in the old GHD guards. Order 247634 Seat and Seal Kit. (5-pack)



You can use the old GHD tips in the new XHD guards. Order XHD010 Seat and Seal Kit. (5-pack)

Contact us today!

For more information, call 1-800-CLEMTEX or visit us online at www.clemtex.com

Distributed by:

